




SecuraSure
FOAM FILLED ROLL FORMED ALUMINUM SLAT
A200-H

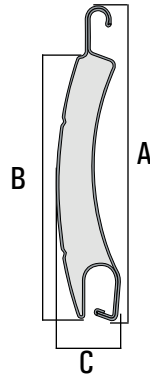

A200-H		
TOTAL HEIGHT (A)	2.58"	66 mm
PROFILE HEIGHT (B)	2.17"	55 mm
PROFILE WIDTH (C)	0.55"	14 mm
WALL GAUGE	0.020"	0.49 mm
WEIGHT	1.72 lbs/sqft	8.7 kg/sqm
MAXIMUM AREA	180 sqft	16.72 sqm

OPERATOR LIMITATIONS FOR A200-H		
OPERATOR	Max sqft	Max sqm
PULLEY (25 LBS)	15 sqft	1.39 sqm
STRAP CRANK (60 LBS)	35 sqft	3.25 sqm
GEAR CRANK (71 LBS)	41 sqft	3.80 sqm
GEAR ASSIST (110 LBS)	64 sqft	5.94 sqm
MOTOR 60MM AXLE (194 LBS)	113 sqft	10.50 sqm
MOTOR 70MM AXLE (352 LBS)	180 sqft*	16.72 sqm*
*LIMITED BY THE MAXIMUM USAGE		

Energy Efficiency


Hurricane Protection



Visual Deterrent

Maximum Security

FEATURES & BENEFITS



HIGH DENSITY FOAM
A thicker density foam provides increased rigidity yielding a stronger slat.



HURRICANE APPROVED
This product has been tested in accordance with hurricane testing standards of TDI & FBC. Engineering available on our web site.



BUILDING CODE STANDARDS
Texas Department of Insurance: SHU-63
Florida Building Code: FL 5231.2



ENVIRONMENTALLY SAFE MATERIALS
Rollac uses 100% CFC free materials in all foam shutters produced.

SYSTEM COLORS

Silk White
Texas Cream
Attica Beige
Smoky Grey
Medium Bronze

SPECIAL CURTAIN COLORS

Arcona Beige
Cream (Lt. Ivory)
Maroon Brown
Arizona Cream
Metallic



COMPONENT INFORMATION

SLAT DETAILS	
A200-H	<ul style="list-style-type: none"> • Double walled roll-formed aluminum • Gauge 0.49 mm / 0.020" • CFC free foam core • Paint thermal stability range: -40° F to 176° F [-40° C to 80° C] • Available with or without light slits


ALUMINUM BASE SLAT FOR MAXI SLATS
Anodized Silver, Cream, White, Grey, Light Beige, Bronze, Dark Brown, Arcona Beige

STANDARD RAIL	
SIDE RAILS "MAXI"	63 mm x 27 mm (2.50" x 1.06")
Anodized Silver, Cream, White, Grey, Light Beige, Bronze, Dark Brown, Arcona Beige	
OPTIONAL RAIL	
SIDE RAILS "MAXI"	76 mm x 27 mm (3.00" x 1.06")
Anodized Silver, Cream, White, Grey, Light Beige, Bronze, Dark Brown, Arcona Beige	


SIDELOCKS (POLYAMIDE INSERTS FOR HARD FOAM)			
A-203 FOR A200-H	Profiles	L. & R. (Screws Included)	PC

SLAT DEDUCTION FOR SHUTTER MANUFACTURING		
SLAT	Small Leg 45° & 90° 4"-10"	Large Leg 45° 10", 12"
A200-H	7.5 cm / 2 7/8"	9.5 cm / 3 3/4"

SHUTTER DIMENSION DIAGRAM

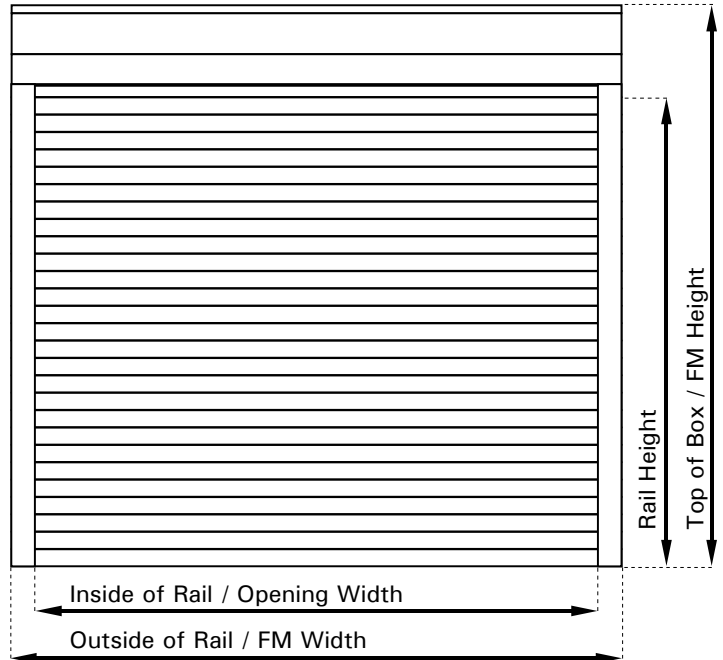

BOX HOUSING SHAPE



45° Box

90° Box

RAIL HEIGHT BY HOUSING SIZE															
BOX SIZE	6" (150 mm)		6.5" (165 mm)		7" (180 mm)		8" (205 mm)		9" (230 mm)		10" (250 mm)		12" (300 mm)		
AXLE	60 mm	70 mm	60 mm	70 mm	60 mm	70 mm	60 mm	70 mm	60 mm	70 mm	60 mm	70 mm	60 mm	70 mm	
A200-H	20"	N/A	32"	N/A	38"	40"	59"	55"	73"	75"	100"	100"	153"	153"	