




**SecuraSure**  
FOAM FILLED ROLL FORMED ALUMINUM SLAT  
**A150-H**

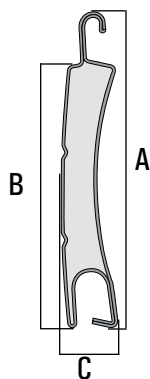

A150-H		
TOTAL HEIGHT (A)	1.87"	48 mm
PROFILE HEIGHT (B)	1.57"	40 mm
PROFILE WIDTH (C)	0.35"	9 mm
WALL GAUGE	0.017"	0.43 mm
WEIGHT	1.120 lbs/sqft	5.5 kg/sqm
MAXIMUM AREA	120 sqft	11.20 sqm

OPERATOR LIMITATIONS FOR A150-H		
OPERATOR	Max sqft	Max sqm
PULLEY (25 LBS)	22 sqft	2.04 sqm
STRAP CRANK (60 LBS)	54 sqft	5.02 sqm
GEAR CRANK (71 LBS)	63 sqft	5.85 sqm
GEAR ASSIST (110 LBS)	98 sqft	9.10 sqm
MOTOR 60MM AXLE (194 LBS)	120 sqft*	11.15 sqm*
*LIMITED BY THE MAXIMUM USAGE		

Energy Efficiency

Hurricane Protection



Visual Deterrent

Maximum Security

**FEATURES & BENEFITS**



**HIGH DENSITY FOAM**

A thicker density foam provides increased rigidity yielding a stronger slat.



**HURRICANE APPROVED**

This product has been tested in accordance with hurricane testing standards of TDI & FBC. Engineering available on our web site.



**BUILDING CODE STANDARDS**

Texas Department of Insurance: SHU-63  
Florida Building Code: FL 5231.1



**ENVIRONMENTALLY SAFE MATERIALS**

Rollac uses 100% CFC free materials in all foam shutters produced.

**SYSTEM COLORS**

Silk White
Texas Cream
Attica Beige
Smoky Grey
Medium Bronze

**SPECIAL CURTAIN COLORS**

Arcona Beige
Cream (Lt. Ivory)
Maroon Brown
Arizona Cream
Metallic



## COMPONENT INFORMATION

SLAT DETAILS	
A150-H	<ul style="list-style-type: none"> <li>• Double walled roll-formed aluminum</li> <li>• Gauge 0.43 mm / 0.017"</li> <li>• CFC free foam core</li> <li>• Paint thermal stability range: -40° F to 176° F [-40° C to 80° C]</li> <li>• Available with or without light slits</li> </ul>


ALUMINUM BASE SLAT FOR MINI SLATS
Anodized Silver, Cream, White, Light Beige, Bronze, Dark Brown, Arcona Beige

STANDARD RAIL	
SIDE RAILS "MINI"	64 mm x 22 mm (2.50" x 0.86")
Anodized Silver, Cream, White, Grey, Light Beige, Bronze, Dark Brown, Arcona Beige	
OPTIONAL RAIL	
SIDE RAILS "MINI"	53 mm x 22 mm (2.09" x 0.86")
Anodized Silver, Cream, White, Grey, Light Beige, Bronze, Dark Brown, Arcona Beige	


SIDELOCKS (POLYAMIDE INSERTS FOR HARD FOAM)			
A-153 FOR A150-H	Profiles	L. & R. (Screws Included)	PC

SLAT DEDUCTION FOR SHUTTER MANUFACTURING	
SLAT	Small Leg 45° & 90° 4"-10"
A150-H	7.5 cm / 2 5/8"

## SHUTTER DIMENSION DIAGRAM

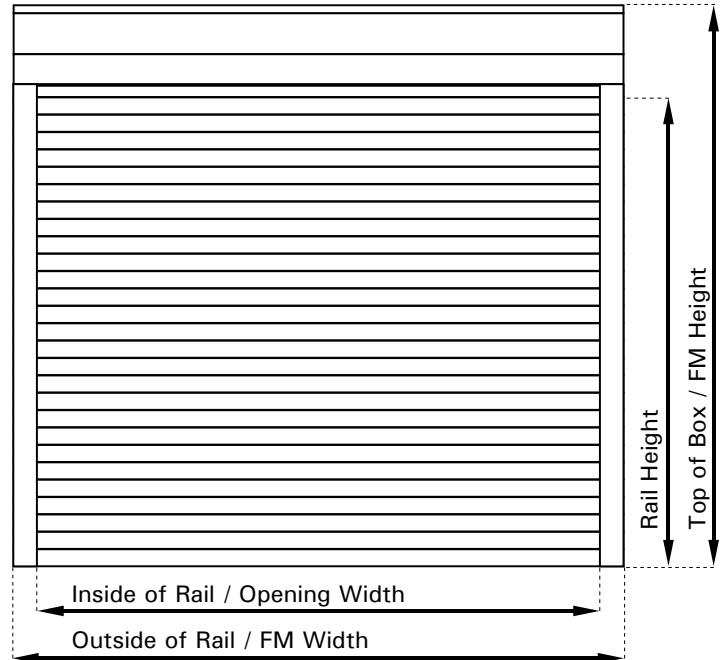

## BOX HOUSING SHAPE



45° Box

90° Box

RAIL HEIGHT BY HOUSING SIZE															
BOX SIZE	6" (150 mm)		6.5" (165 mm)		7" (180 mm)		8" (205 mm)		9" (230 mm)		10" (250 mm)		12" (300 mm)		
AXLE	40 mm	60 mm	40 mm	60 mm	40 mm	60 mm	40 mm	60 mm	40 mm	60 mm	40 mm	60 mm	40 mm	60 mm	
A150-H	48"	40"	58"	55"	67"	64"	103"	96"	128"	120"	173"	169"			